

## **Recognition and Restoration of Distorted Tamil Documents Using Edge Detection Algorithms**

R. Indra Gandhi <sup>1</sup>, Dr.K.P.Kaliyamurthie <sup>2</sup>

<sup>1</sup>*Department of Computer Science and Engineering, Bharath University*

<sup>2</sup>*Department of Computer Science and Engineering, Bharath University*

**Abstract** — Most of our valuable aged records have distortion. It might be because of poor maintenance, poor paper quality, prolonged disturbances like blurring of ink and damages done by bookworms like silverfish and booklouse. Although paper documents are omnipresent in our society, there is a need to have many of these documents stored in electronic format to enhance their lifespan and readability. The conversion might be adopted by scanning, printing, photocopying and faxing also introduce distortions to the images. Human beings often notice the distortions present in photocopies taken from photocopies of text documents. Smaller distortions, which might not be noticeable by humans, are still large enough to interfere with the ability of a computer to read text. It was these practical complications which formed the base for this paper. In this paper an attempt is made by Simulink towards distorted document image using Sobel edge detection algorithm. The main goal of edge detection is to locate and identify sharp discontinuities from an image that helps to find the edges in an input image by approximating the gradient magnitude of the image.

**Keywords**-Distorted, Character recognition, Edge Detection, Simulink, Gradient Magnitude

### **I. INTRODUCTION**

In today scenario of pattern recognition most of the computer vision systems, orientation and intensity information about edges in images are used as primary input for further processing to document identification. Precise information about edges is vital to the success of such systems. In other words edge detection is the first step in many computer vision applications. Edge detection significantly reduces the amount of data and filters out unwanted or insignificant information and gives the significant information in an image. This information is used in image processing to detect objects. There are some problems like false edge detection, problems due to noise, missing of low contrast boundaries etc. In practice, accurately detecting the continuous contours is very hard and time consuming especially when noise exists in the images [1]. The edge detection process typically results in a edge map which is usually a binary image. All images describe the major classification of each pixel of the images, as well as some other edge attributes such as magnitude and orientation. The main goal of edge detection is to locate and identify sharp discontinuities from an image. These discontinuities are due to abrupt changes in pixel intensity which characterizes boundaries of objects in a scene [2].

### **II. EVALUTION OF EDGE DETECTOS AND ITS CHALLENGES IN EDGE DETECTION**

The main function of edge detection is to find the boundaries of image regions based on properties such as intensity and texture. In 1993 Huttenlocher et al [3] expressed their techniques by comparing images using the Hausdorff distance to recognize an object. Till 1999, there was little bit of contribution towards edge detection techniques. Later stage it stated its own path in image processing. There by an objective method for the evaluation of edge detectors and they were often compared to each other through a subjective assessment method. Shin et al [4] used an object

recognition system for an objective comparison of edge detectors. Edge detection as low-level feature detection is one of the critical elements in image processing.. Although many algorithms have been proposed to detect edges in noisy images, RRO [4] are very commonly used in edge detection in noisy images and will be compared with the new approaches proposed.

The technique used by Bowyer et al. [5] during 2001 proposed many measures to objectively evaluate the performance of edge detectors. Ground truth images are required for most of these measures. The receiver operating characteristic curve (ROC curve) is one of the commonly used techniques for an objective evaluation. The ROC curve in an edge detection problem is a plot of the fraction of true positive edges (TPR = true positive rate) versus the fraction of false positives edges (FPR = false positive rate). In this method, area under the curve (AUC) is the traditional metric for comparing ROC curves resulting from different edge detectors. An attempt during 2001 by Shin et al. [6] to perform edge detection algorithms successfully evident the assessment of edge detectors using indirect method. Later it was compared when they were applied to a motion detection task.

At some point in 2004 Martin et al [7] open a method known as precision verses recall curves. The precision denotes the proportion of the edges resulting from an edge detector which are true positives rather than false positives. The recall curves rate the means of true positives that are recognised rather than missed. To add the same edge detection Moreno et al. [8] open four other measures, namely, completeness, discrimination ability, precision, and robustness ability of an edge detector. The completeness is a measure that shows the ability of an edge detector to detect all possible edges in noiseless images. The discrimination ability is the ability of an edge detector to discriminate between important and not important edges. The false alarm rejection measure (precision measure) is the ability of an edge detector to detect edges as close as possible to ideal edges of noisy and noiseless images respectively.

During edge detection processing all document undergoes any one of the below challenges and increases the resultant detection result. Some of the important and often found challenges by researchers are as follows:

- Changes in illumination conditions
- Surrounding lightning is most of the timing dynamic
- Luminance and geometrical features directly affects the images,
- Minimum Percentile Distortion has a great impact on shaping the edge.
- Missing to detect existing edges.
- False detection of edges where it does not exist commonly known as false edge.
- Position of the detected edge to be shifted from its true location otherwise called as shifted edge or dislocated edge

### III. IMPLEMENTATION

Step by Step procedure to use the Edge Detection-Simulink block, for given distorted document images to detect resultant edges.


Step 1: Start the process by enabling Edge Detection Block to simulate the edge detection procedure using Simulink Library Browser.

Step 2: Finds the distorted input image by executing parameters in functional blocks

Step 3: Execute Threshold Scale factor Detector for Edge Detection using Sobel Method threshold value function.

Step 4: Extend various connection action blocks to find “Final Edge Detection Simulation Model using Sobel Method”

Step 5: Construct a block to load input file with the property block name of “Image from File” (refer Figure 1)

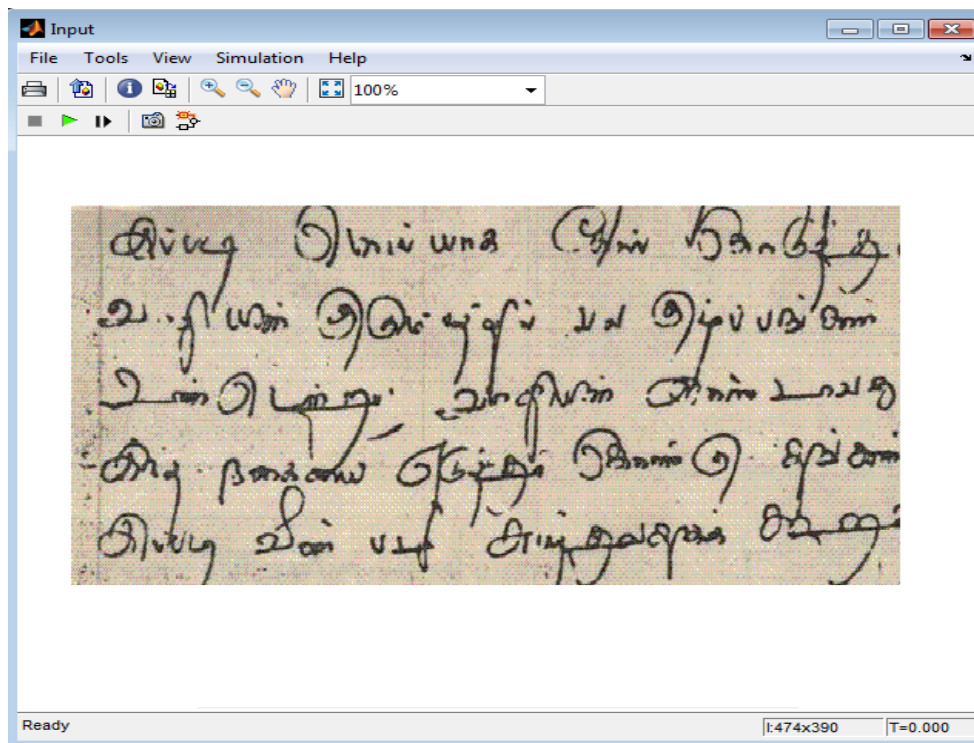


*Figure 1 Distorted Document Image File Loaded in Simulation*

**Step 6:** The input image is linked and processed within this functional block, where the color space conversion operation is executed. In this stage, the original image is transformed from one color representation format to another, such as RGB to grayscale, to simplify further image processing operations and improve edge detection accuracy.


**Step 6.1:** Image data type conversion is performed at this stage to ensure compatibility with subsequent processing algorithms (refer Figure 2). The pixel values of the image are converted into an appropriate numerical format, such as integer or floating-point representation, enabling efficient computation and accurate image analysis during processing.

**Step 6.2:** Various edge detection operational methods are listed and configured at this stage, including commonly used algorithms such as **Sobel**, **Prewitt**, **Roberts**, and **Canny**. These methods are used to identify and highlight the edges and structural boundaries present in the image. The selection of a suitable algorithm depends on factors such as noise sensitivity, edge sharpness, computational complexity, and detection accuracy required for the application.

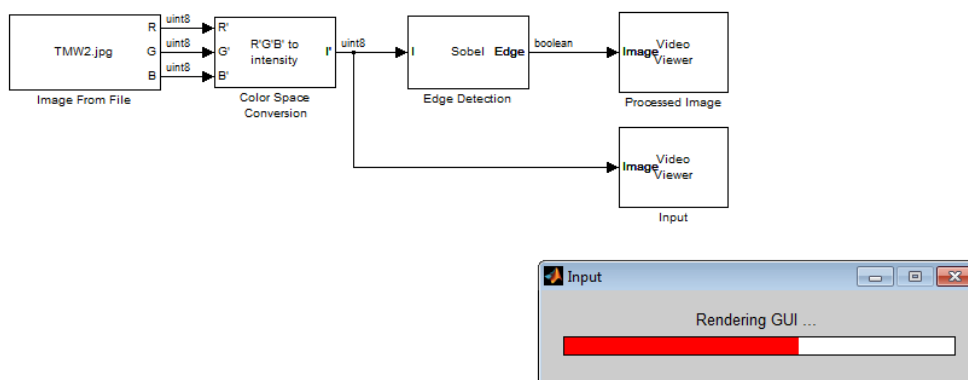

**Figure 2** Rendering GUI Model for Distorted Input Image

Step 7: Selection of Sobel Edge detection takes place

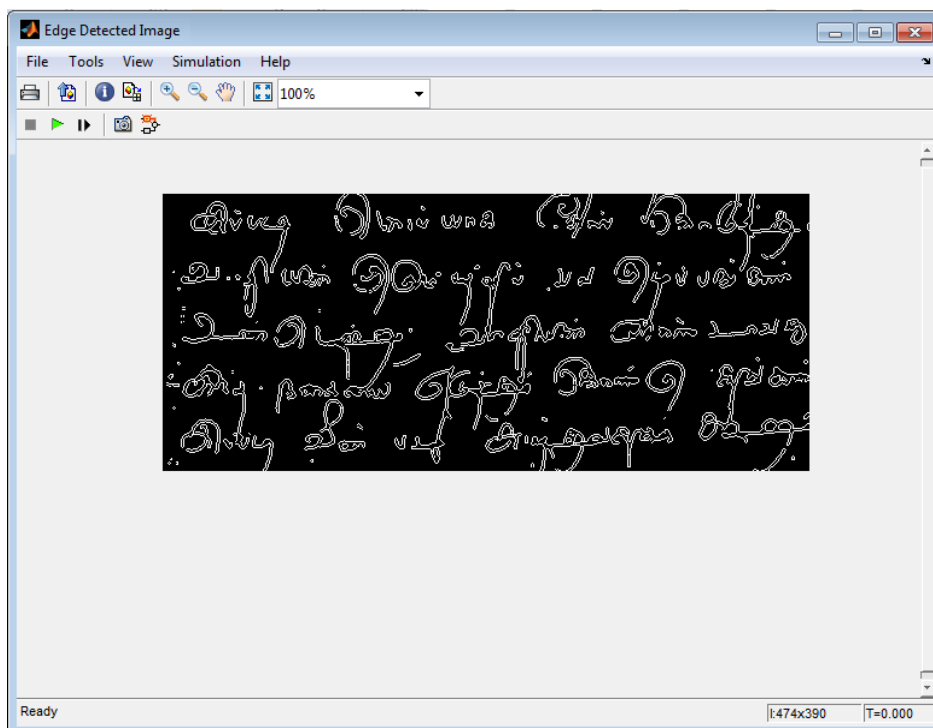

**Figure 3** Edge Detected Document Image after Edge Detection processing


**Step 8:** Perform the required Boolean operations and transfer the processed output data to the designated output file or memory location. This step ensures that the logical conditions defined in the program are executed correctly, and the corresponding output signals are generated for further processing and monitoring.

**Step 9:** Double-click the **Generate Code** option followed by the **Create Project** operation to automatically generate the respective source code for all configured functional blocks. The software

compiles the logical structure of the blocks and converts them into executable programming code required for controller implementation and simulation.

**Step 10:** Build the complete project by selecting the **Build Project** option. During this stage, the system checks the generated code for syntax errors, configuration mismatches, and compilation issues. Once verification is completed successfully, the executable program is prepared for deployment and execution.

**Step 11:** Double-click the **Loading and Running** option to upload the generated program into the target environment or simulation platform. After successful loading, the system begins execution, and the operational results, output responses, and status indications are displayed on the screen for analysis and verification (refer Figure 4).

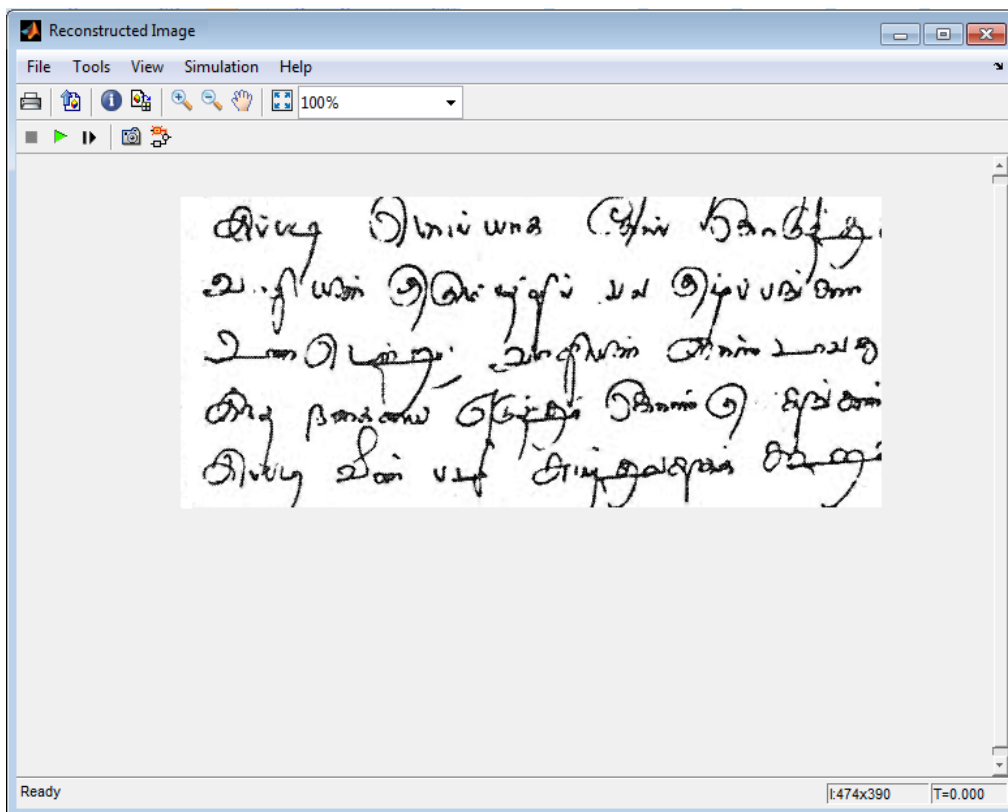

*Figure 4 Reconstructed Document Image after Gray Scale Processing*

#### IV. CONCLUSION

The obstacles associated with the recognition of distorted document and the solution to overcome them is given in all selected distorted document. The proposed method proves to perform well regardless of the intensity differences between foreground and background. This is extremely useful for researchers engaged in recognizing the distorted documents in any script worldwide as the same kind of distortion can be found in most of the scripts used in the world. There is always a way better than the one that has been followed. Every versatile solution will have adequate flexibility for further extensions.

## REFERENCES

- [1] R.C.Gonzalez and R.E.Woods, "Digital Image Processing", Prentice Hall, 2007
- [2] Saket Bhardwaj, Ajay Mittal, "A Survey on Various Edge Detector Techniques", Elsevier LtdProcedia Technology 4, Pigno: 220 – 226, 2012.
- [3] D. Huttenlocher, G. Klanderman, and W. Rucklidge, "Comparing images using the Hausdorff distance," IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 15, pp. 850–863, 1993.
- [4] M. C. Shin, D. Goldgof, and K. W. Bowyer, "Comparison of edge detectors using an object recognition task," Proceedings of the IEEE Computer Society Conference on Computer Vision and Pattern Recognition, vol. 1, pp. 1360–1365, 1999.
- [5] K. Bowyer, C. Kranenburg, and S. Dougherty, "Edge detector evaluation using empirical ROC curves," Computer Vision and Image Understanding, vol. 84, no. 1, pp. 77–103, 2001.
- [6] M. Shin, D. Goldgof, K. Bowyer, and S. Nikiforou, "Comparison of edge detection algorithms using a structure from motion task," IEEE Transactions on Systems, Man, and Cybernetics, Part B: Cybernetics, vol. 31, no. 4, pp. 589–601, 2001.
- [7] D. R.Martin, C. C. Fowlkes, and J.Malik, "Learning to detect natural image boundaries using local brightness, color, and texture cues," IEEE Transactions on Pattern Analysis and Machine Intelligence, vol. 26, no. 5, pp. 530–549, 2004.
- [8] R. Moreno, D. Puig, C. Julia, and M. Garcia, "A new methodology for evaluation of edge detectors," in Proceedings of the 16th IEEE International Conference on Image Processing (ICIP), 2009, pp. 2157–2160.
- [9] H. Voorhees and T. Poggio," Detecting textons and texture boundries in natural images" ICCV 87:250-25,198.  
S.E.Umbaugh, "Computer Imaging : Digital Image Analysis and Processing", CRC Press, 2005